

## BOCAS DE VENTILACION S-SVF

### Características generales



Bocas de ventilacion de impulsión

Cone central ajustable


Collar de montaje 50 mm

Color : blanco, RAL 9010

Diametros disponibles: de 80 a 200 mm

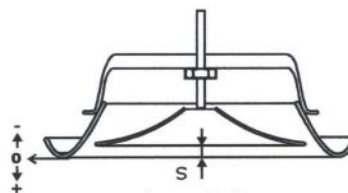

### Datos Tecnicos

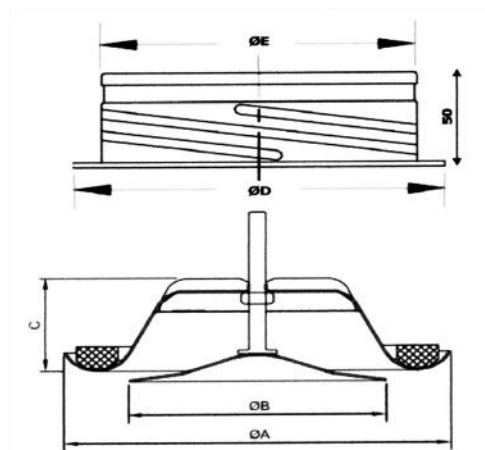

TYPE	Dia A (mm)	Dia B (mm)	C (mm)	Dia D (mm)	Dia E (mm)
S-SVF 80	116	80	39	105	79
S-SVF 100	140	93	38	125	99
S-SVF 125	166	112	45	150	124
S-SVF 150	200	137	53	175	149
S-SVF 160	202	148	50	186	159
S-SVF 200	247	195	56	225	199



Tolerancia: +/- 3 mm excepto Dia E : Tolerancia : +/- 1 mm



**NEU 6000, S.A.**

Pol. Ind. "La Torre"  
Av. Joaquim de Barnola i Bassols, 6  
08760 Martorell - Barcelona  
SPAIN

T. +34 93 774 57 09  
F. +34 93 774 18 33  
neu@rami-system.es  
www.rami-system.es



## BOCAS DE VENTILACION S-SVF

### Características de flujo de aire y de sonido

TYPE DE BOUCHE	DEBITOS (m3/h)	DEBITOS (l/s)	APERTURA S (mm)	DELTA PT (Pa)	dBA		
Dia 80	40	11	3	35	22		
			0	80	31		
	60	17	9	40	30		
			6	55	32		
			3	100	38		
Dia 100	80	22.2	8	35	25		
			6	55	30		
			4	85	34		
	100	27.8	10	58	33		
			8	72	36		
			10	68	36		
Dia 125	100	27.8	6	35	23		
			3	50	26		
			0	90	34		
	140	39	15	28	25		
			12	34	27		
			9	45	28		
			6	65	33		
			3	100	36		
	180	50	15	45	32		
			12	50	33		
9			70	35			
10			25	20			
5			42	23			
Dia 160	160	41	2	70	30		
			0	90	35		
			10	40	24		
			5	68	30		
	200	56	2	95	35		
			15	38	26		
			10	59	30		
			5	95	36		
			250	69	15	38	26
			10		59	30	
Dia 200	300	83	5	95	36		
			20	25	25		
			15	35	27		
			12	50	30		
			9	68	32		
	350	97	6	100	35		
			20	35	30		
			15	55	33		
	400	111	12	70	35		
			20	50	34		
			15	65	36		



**NEU 6000, S.A.**

Pol. Ind. "La Torre"  
Av. Joaquim de Barnola i Bassols, 6  
08760 Martorell - Barcelona  
SPAIN

T. +34 93 774 57 09  
F. +34 93 774 18 33  
neu@rami-system.es  
www.rami-system.es