

NSF & ISF

General description

Suspension rings for rigid circular ducts.

Rapid hanging system for diameters 400 mm and smaller.

Easy set up.

Available without liner (NSF) or with liner (ISF).

Available in stainless steel on request.




Technical specifications

	DIA ≤ 400 mm	DIA ≥ 450 mm
MATERIAL	Galvanized steel	Galvanized steel
DOUBLE THREADED CENTRAL NUT	M8 / M10	M8 / M10
THICKNESS	1,8 mm	2,5 mm
WIDTH	20 mm	25 mm
SIDE FIXINGS	M6 x 20 mm	Hole dia. 11 mm + Bolts M10 x 25 mm
MAXIMUM RECOMMENDED LOAD WITH CENTRAL SUSPENSION NUT *	70 Kg	100 Kg
MAX. RECOMMENDED LOAD THROUGH SIDE ANCHOR POINTS *	-	200 Kg
WELD RESISTANCE OF CENTRAL NUT (TORQUE)	Max. 25 N/m	Max. 25 N/m

*Load rating is covered by a 5 : 1 safety factor & based upon a vertically applied load

Application

≤ 400 mm

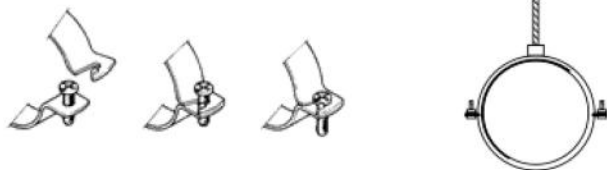

≥ 450 mm



Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.

2017.04.14



NEU 6000, S.A.

Pol. Ind. "La Torre"
Av. Joaquim de Barnola i Bassols, 6
08760 Martorell - Barcelona
SPAIN

T. +34 93 774 57 09
F. +34 93 774 18 33
neu@rami-system.es
www.rami-system.es