


TECHNICAL DATA SHEET FLAT ACCESS DOOR INSULATED

RAMI-SYSTEM® IDENTIFICATION CODE	1R00XXXX
PRODUCT NAME	GALVA. FLAT ACCESS DOOR INSULATED
PRODUCT DESCRIPTION	INSUL-TIP-XX
PRODUCT'S APPLICATION FIELD	RECTANGULAR DUCT OF INSULATED PANEL
MATERIAL SPECIFICATION	GALVANIZED STEEL DX51+Z275 MAC
THICKNESS (mm)	0,8 - 1,0 - 1,2
No. OF SIZES ACCORDING TO DUCT DIMENSION	7
GASKET SEAL (mm)	CLOSED CELL POLYETHYLENE 6 mm
TIGHTENING THROUGH 2 BLUE POLYAMIDE KNOBS	ON M-8 / M-10 THREADED BARS
TEMPERATURE WORK RANGE	-40° C / +90° C
EASY ASSEMBLY:	USING A SELF-ADHESIVE TEMPLATE
1 ST STICK TEMPLATE ON THE DUCT	2 ND CUT HOLE FOLLOWING ITS CONTOUR
3 RD LOOSEN THE KNOBS OF THE ACCESS DOOR	4 TH PLACE IT IN THE HOLE AT AN ANGLE AND TIGHTEN


FLAT AND CURVED ACCESS DOORS

RAMI-SYSTEM®

TEMPLATE MEASUREMENTS
mm
DOOR'S OUTSIDE MEASUREMENTS

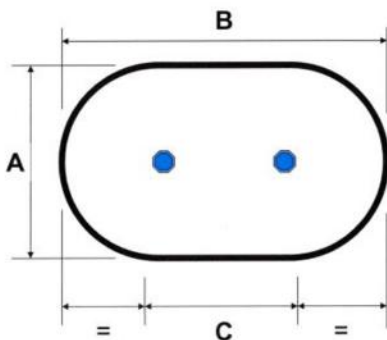

SIZES		A	B	C
THICK.	HEIGHT			
180x80		81	184	103
0,8	8	110	210	100
200x100		100	200	103
0,8	8	117	219	105
250x150		152	242	90
0,8	8	183	272	89
300x200		200	300	100
0,8	8	230	330	100
400x300		300	382	82
1,0	10	332	412	87
500x400		400	500	100
1,2	9	433	530	97
600x450		448	602	154
1,2	14	480	628	148

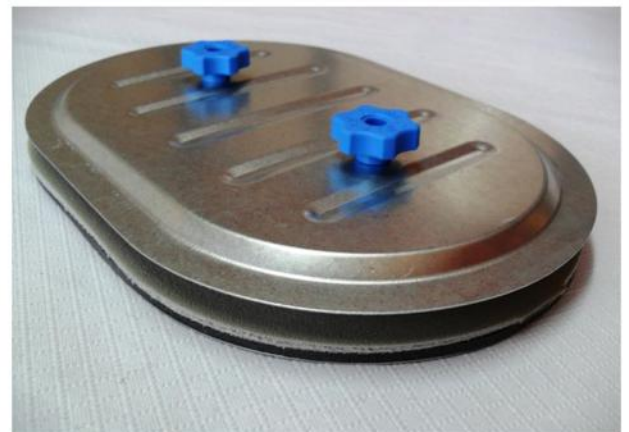

NEU - 6000, S.A.
Poligono Industrial "La Torre"
Joaquim Barnola i Bassols, 6
08760 - MARTORELL - Barcelona
Tel. 93-7745709 Fax: 93-7741833
www.rami-system.es ventas@rami-system.es

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.



NEU 6000, S.A.

Pol. Ind. "La Torre"
Av. Joaquim de Barnola i Bassols, 6
08760 Martorell - Barcelona
SPAIN

T. +34 93 774 57 09
F. +34 93 774 18 33
neu@rami-system.es
www.rami-system.es