


TECHNICAL DATA SHEET CURVED ACCESS DOOR INSULATED FOR DOUBLE DUCT

RAMI-SYSTEM® IDENTIFICATION CODE	1R015XXX
PRODUCT NAME	CURVED DOOR INSUL. FOR DOUBLE DUCT
PRODUCT DESCRIPTION	TIC-DT-XX
PRODUCT'S APPLICATION FIELD	DOUBLE DUCTS WITH INSULATION
MATERIAL SPECIFICATION	GALVANIZED STEEL DX51+Z275 MAC
THICKNESS (mm)	0,8 - 1,0 - 1,2
No. OF SIZES ACCORDING TO DUCT DIMENSION	4
GASKET SEAL (mm)	CLOSED CELL POLYETHYLENE 6 mm
TIGHTENING THROUGH 2 BLUE POLYAMIDE KNOBS	ON M-8 / M-10 THREADED BARS
TEMPERATURE WORK RANGE	-40° C / +90° C
EASY ASSEMBLY:	2 SELF-ADHESIVE TEMPLATE OF DIFFERENT SIZE
1 ST STICK TEMPLATE ON OUTSIDE DUCT	2 ND CUT HOLE FOLLOWING ITS CONTOUR
3 RD REPEAT PREVIOUS STEPS ON INSIDE DUCT	4 TH PLACE DOOR ON INSIDE DUCT, TRAY ON OUTSIDE


ACCESS DOORS PAIRING INSIDE/OUTSIDE

RAMI-SYSTEM®

TEMPLATE MEASUREMENTS
mm
DOOR'S OUTSIDE MEASUREMENTS

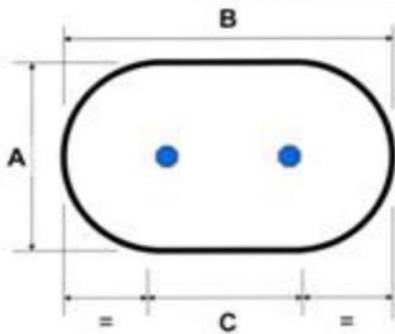

SIZES		A	B	C
THICK.	HEIGHT			
0,8	80	81	154	103
0,8	8	110	210	100
0,8	8	117	219	105
0,8	8	152	242	90
0,8	8	183	272	89
0,8	8	200	300	100
0,8	8	230	330	100
1,0	10	300	382	82
1,0	10	332	412	87
1,2	12	400	500	100
1,2	12	433	530	97
1,2	12	448	602	154
1,2	14	480	628	148

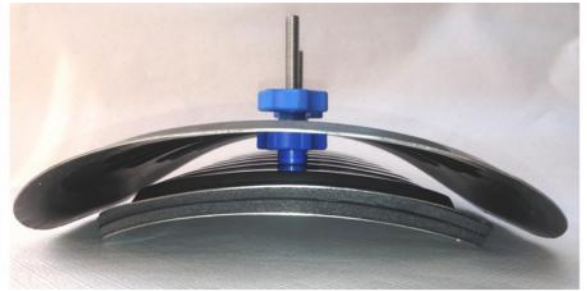

NEU - 6000, S.A.
Poligono Industrial "La Torre"
Joaquim Barnola i Bassols, 6
08760 - MARTORELL - Barcelona
Tel: 93-7745709 - Fax: 93-7741833
www.0874-523827.es - ventas@rami-system.es

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.



NEU 6000, S.A.

Pol. Ind. "La Torre"
Av. Joaquim de Barnola i Bassols, 6
08760 Martorell - Barcelona
SPAIN

T. +34 93 774 57 09
F. +34 93 774 18 33
neu@rami-system.es
www.rami-system.es