


## TECHNICAL DATA SHEET CURVED ACCESS DOOR INSULATED FOR DOUBLE DUCT 400° STAINLESS STEEL

| The state of the second control of the secon | A STANDARD CONTROL OF THE CONTROL OF |
|--|--|
| RAMI-SYSTEM® IDENTIFICATION CODE   | 1D222XXX   |
| PRODUCT NAME   | CURVED DOOR INSULATED DOUBLE DUCT 400° SS  |
| PRODUCT DESCRIPTION  | TIC-DT-HT-INOX-XX  |
| PRODUCT'S APPLICATION FIELD  | HIGH TEMPERATURE INSULATED DOUBLE DUCT   |
| MATERIAL SPECIFICATION   | STAINLESS STEEL AISI-304 / AISI-316  |
| THICKNESS (mm)   | 0,8 - 1,0 - 1,2  |
| No. OF SIZES ACCORDING TO DUCT DIMENSION   | 4  |
| GASKET SEAL (mm)   | DOUBLE CERAMIC GASKET 18 X 4 mm  |
| TIGHTENING THROUGH 2 METAL SMELTING KNOBS  | ON M-8 / M-10 THREADED BARS  |
| TEMPERATURE WORK RANGE   | -40° C / +1000° C  |
| EASY ASSEMBLY:   | 2 SELF-ADHESIVE TEMPLATES DIFFERENT SIZE   |
| 1 <sup>ST</sup> STICK TEMPLATE ON OUTSIDE DUCT   | 2 <sup>ND</sup> CUT HOLE FOLLOWING ITS CONTOUR   |
| 3RD REPEAT PREVIOUS STEPS ON INSIDE DUCT   | 4TH PLACE DOOR ON INSIDE DUCT, TRAY ON OUTSIDE   |



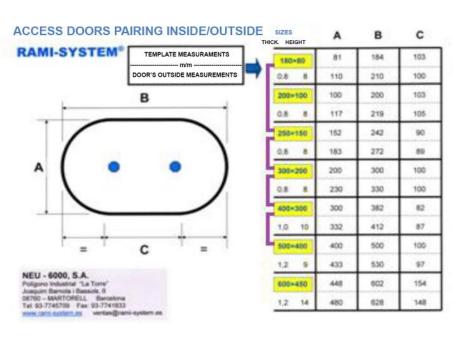

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.

