


# Strut *Foot*

Universal Flat Roof Support System

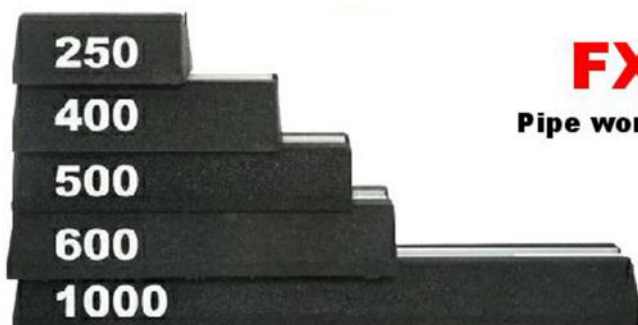

## FX Range

Pipe work, Cable management



**Typical Application** The 7 FX feet of the range are a practical and versatile support solution for supporting your services on a roof. The feet have a 40mm x 20mm Pre Galvanised channel recessed into the top face allowing you to use standard strut fixings to secure your services to the feet. This product is suitable for pipe work and cable runs.

The range of products are made of durable recycled rubber, which offers built-in anti-vibration and makes it both economical and environmentally friendly.

Model	Height (mm)	Width (mm)	Length (mm)	Max loading per foot (Kg)
FX 250	95	180	250	160
FX 400	95	180	400	240
FX 500	80	180	500	400
FX 500 High	150	180	500	400
FX 600	95	180	600	450
FX 600 High	200	180	600	450
FX 1000	95	180	1000	645
FX 250 Low	50	130	250	160
FX 500	50	130	500	400

### MATERIAL SPECIFICATION

SBR-Recycled Rubber. Bound using a ratio of high quality moisture curing Polyurethane Pre-Polymer.  
BS7188:1989+A2;2009 and BS EN1176-7:2008

### METAL PROFILE

Pre Galvanised strut 40mm x 20mm profile compatible with strut fixings.

### WORKING CONDITIONS

Suitable for internal or external applications in temperatures between -40°C to +80°C. BSEN60068-2-14