
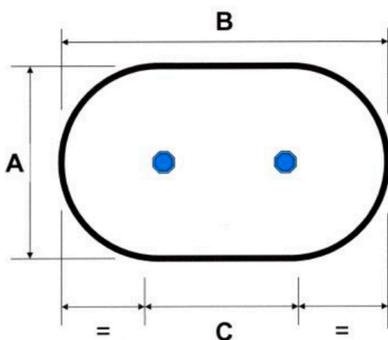


TECHNICAL DATA SHEET FLAT ACCESS DOOR INSULATED + TRAY


RAMI-SYSTEM® IDENTIFICATION CODE	1Y111XXX
PRODUCT NAME	INSULATED ACCESS DOOR + TRAY
2 TYPES OF TRAY	OF 20 mm OR 40 mm
PRODUCT'S APPLICATION FIELD	DOUBLE RECT. DUCTS OR INSULATED PANELS
MATERIAL SPECIFICATION	GALVANIZED STEEL DX51+Z275 MAC
THICKNESS (mm)	0,8 - 1,0 - 1,2
No. SIZES A/ DUCT DIMENSION & PLACEMENT	7 / A/ UNE-EN 12097:2007
AIRTIGHTNESS LEVEL	CLASS D
GASKET SEAL (mm)	CLOSED CELL POLYETHYLENE 6 mm
TIGHTENING THROUGH 2 BLUE POLYAMIDE KNOBS	ON M-8 / M-10 THREADED BARS
TEMPERATURE WORK RANGE	-40° C / +90° C
EASY ASSEMBLY:	USING A SELF-ADHESIVE TEMPLATE
1 ST STICK TEMPLATE ON THE INSIDE DUCT	2 ND CUT HOLE FOLLOWING ITS CONTOUR
3 RD FIX TRAY USING THE 2 DRILL HOLES	4 TH PLACE ACCESS DOOR AND TIGHTEN

FLAT AND CURVED ACCESS DOORS

RAMI-SYSTEM®



SIZES		A	B	C
THICK.	HEIGHT			
180x80	0,8	81	184	103
200x100	0,8	110	210	100
250x150	0,8	117	219	105
300x200	0,8	152	242	90
400x300	0,8	183	272	89
500x400	0,8	200	300	100
600x450	0,8	230	330	100
	1,0	300	382	82
	1,0	332	412	87
	1,2	400	500	100
	1,2	433	530	97
	1,2	448	602	154
	1,2	480	628	148

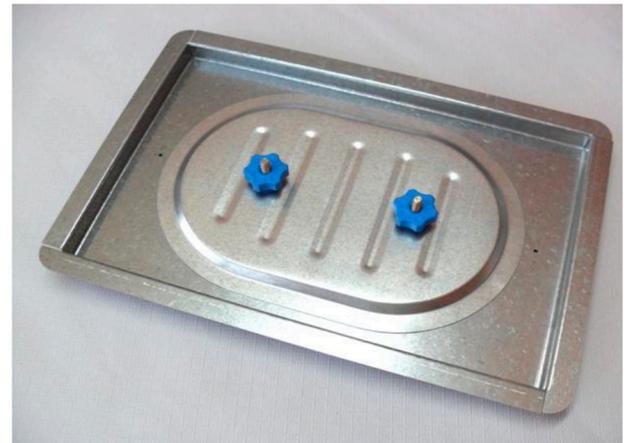

NEU - 6000, S.A.
Polígono Industrial "La Torre"
Joaquim Barnola i Bassols, 6
08760 - MARTORELL - Barcelona
Tel: 93-7745709 Fax: 93-7741833
www.rami-system.es ventas@rami-system.es

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.



NEU 6000, S.A.

Pol. Ind. "La Torre"
Av. Joaquim de Barnola i Bassols, 6
08760 Martorell - Barcelona
SPAIN

T. +34 93 774 57 09
F. +34 93 774 18 33
neu@rami-system.es
www.rami-system.es